



Read this document carefully before using this device. The guarantee will be expired by device damages if you don't attend to the directions in the user manual. Also we don't accept any compensations for personal injury, material damage or capital disadvantages.

ENDA CT Series Current Transformers


Thank you for choosing ENDA CT Series Current Transformers



R^{HS}
Compliant

TECHNICAL SPECIFICATIONS		
Order Code	CT30	CT20
Input Current	120A (Max. 10Ω)	300A (Max. 10Ω)
Output Current	60mA	150mA
Frequency	50/60Hz	
Ratio	1/2000 ±1%	
Accuracy	Class : 0,2	
Primary - Secondary Isolation	3000 Vrms 1 minute	
Operating and Storage Temperature	-25 ... +65°C	
Case	PBT (UL94 - V0)	
Connection Cable	0.33mm ²	
Weight	Approx. 50g	Approx. 75g

While cleaning the device, solvents (thinner, gasoline, acid etc.) or corrosive materials must not be used.

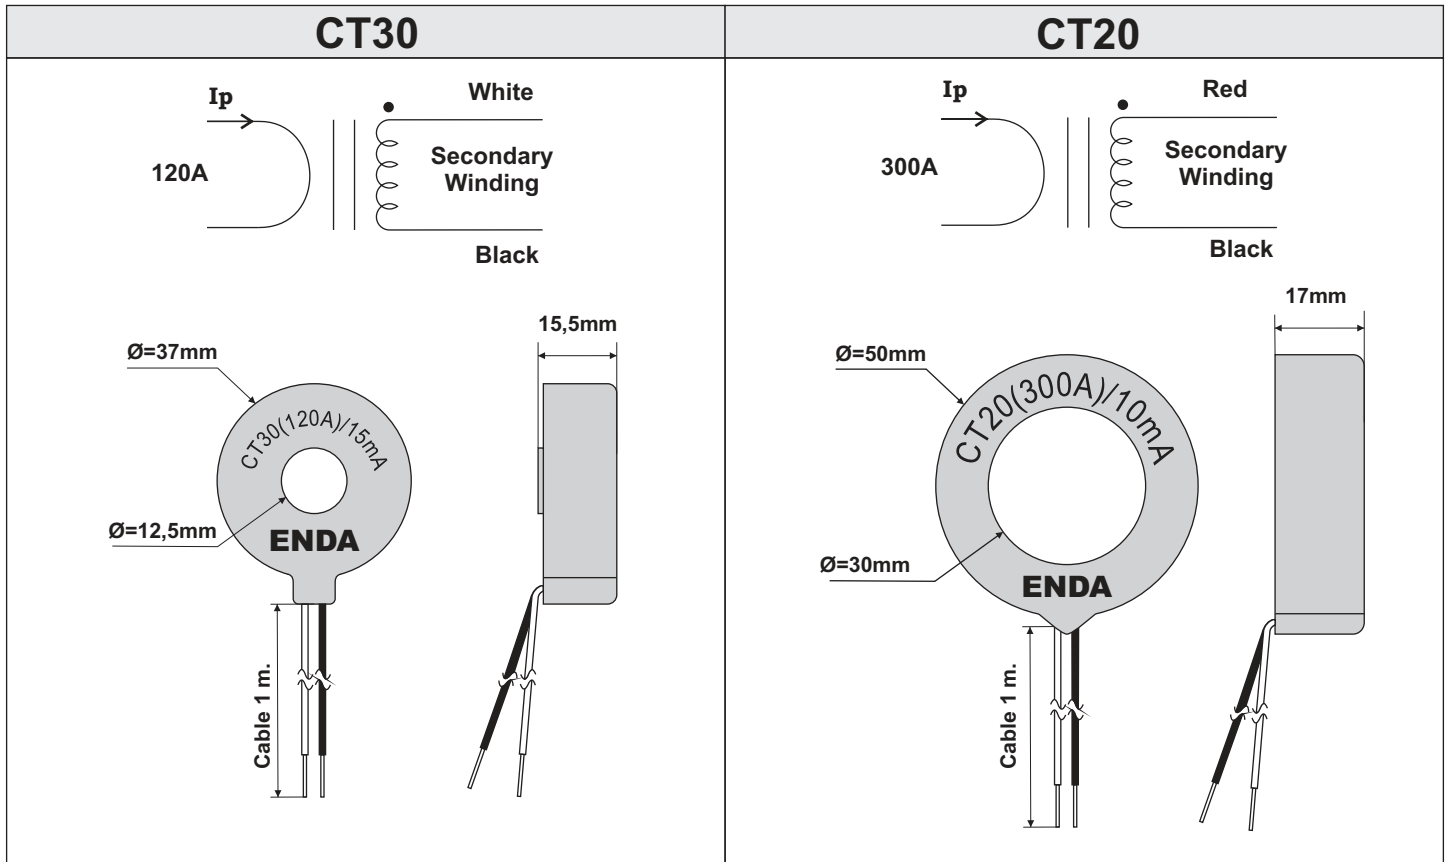

SİSEL MÜHENDİSLİK ELEKTRONİK SAN. VE TİC. A.Ş.
Şerifali Mah. Barbaros Cad. No:18 Y.Dudullu 34775
ÜMRANIYE/İSTANBUL-TURKEY
Tel : +90 216 499 46 64 Pbx. Fax : +90 216 365 74 01
url : www.enda.com.tr

ENDATM