



Read this document carefully before using this device. The guarantee will be expired by device damages if you don't attend to the directions in the user manual. Also we don't accept any compensations for personal injury, material damage or capital disadvantages.

ENDA ET2011 PID TEMPERATURE CONTROLLER

Thank you for choosing ENDA ET2011 temperature controller.

- ▶ 35x77mm sized.
- ▶ Dual setpoint selection.
- ▶ Thermocouple types or PT100 input selection (specify at order).
- ▶ PID Self Tune.
- ▶ **Selftune automatic PID calculation or manually enter PID parameters if known.**
- ▶ Soft-Start feature.
- ▶ Zero point input shift.
- ▶ Alarm or temperature control assignment for CA/2 relay output.
- ▶ SSR Output control selection.
- ▶ Heating/Cooling control selection.
- ▶ In case of sensor failure, manual control or relay positions can be selected.
- ▶ CE Marked According to European Norms.



Order Code : ET2011 - -

1 2

1- Supply Voltage 230V...230V AC LV.....10-30V DC / 8-24V AC	2- Input Selection RT...PT100 Input T.....TC Input
--	---

TECHNICAL SPECIFICATIONS

Input Type		Scale Range		Accuracy	
		°C	°F		
PT100 Resistance thermometer	EN 60751	-99.9...300.0 °C	-99.9...543.0 °F	± 0,5% (of full scale)	± 1 digit
PT100 Resistance thermometer	EN 60751	-200...600 °C	-328...1112 °F	± 0,5% (of full scale)	± 1 digit
J (Fe-CuNi) Thermocouple	EN 60584	0... 600°C	+32... +1112°F	± 0,5% (of full scale)	± 1 digit
K (NiCr-Ni) Thermocouple	EN 60584	0...1300°C	+32... +2372°F	± 0,5% (of full scale)	± 1 digit
T (Cu-CuNi) Thermocouple	EN 60584	0... 400°C	+32... +752°F	± 0,5% (of full scale)	± 1 digit
S (Pt10Rh-Pt) Thermocouple	EN 60584	0...1700°C	+32... +3092°F	± 0,5% (of full scale)	± 1 digit
R (Pt13Rh-Pt) Thermocouple	EN 60584	0...1700°C	+32... +3092°F	± 0,5% (of full scale)	± 1 digit

ENVIRONMENTAL CONDITIONS	
Ambient/Storage Temperature	0 ... +50°C/-25 ... +70°C (with no icing)
Max. Relative Humidity	80% Relative humidity for temperatures up to 31°C, decreasing linearly to 50% at 40°C.
Rated Pollution Degree	According to EN 60529 ; Front Panel : IP65, Rear Panel : IP20
Height	Max. 2000m

KEEP AWAY device from exposed to corrosive, volatile and flammable gases or liquids and **DO NOT USE** the device in similar hazardous locations.

ELECTRICAL CHARACTERISTICS	
Supply	230V AC +%-10-%20 ,50/60Hz ; 10-30V DC / 8-24V AC SMPS
Power Consumption	Max. 5VA
Wiring	Power connector: 2.5mm ² screw-terminal conenction.
Line Resistance	Max. 100Ω
Data Retention	EEPROM (minimum 10 years).
EMC	EN 61326-1: 2013
Safety Requirements	EN 61010-1: 2010 (Pollution degree 2, overvoltage category II)

OUTPUTS	
C/A2 Output	Relay : 250V AC, 8A (for resistive load), Selectable as NO+NC Control or Alarm2 output.
SSR Output	Max 20mA 12Volt (as control output).
Life Expectancy for Relay	Mechanical 30.000.000; Electrical 100.000 operation. 250V AC, 8A (resistive load).

CONTROL	
Control Type	Single set-point and alarm control.
Control Algorithm	On-Off / P, PI, PD, PID (selectable).
A/D Converter	12 bit.
Sampling Time	100ms.
Proportional Band	Can be adjusted between 0% and 100%. If Pb = 0%, On-Off control is selected.
Control Period	Can be adjusted between 1 and 250 seconds.
Hysteresis	Can be adjusted between 1 and 50°C/F.
Output Power	The ratio of power at a setpoint can be adjusted between 0% and 100%.

HOUSING	
Housing Type	Suitable for flush-panel mounting according to DIN 43 700.
Dimensions	W77xH35xD71mm
Weight	Approx. 215g (after packing)
Enclosure Material	Self extinguishing plastics.

Avoid any liquid contact when the device is switched on.
DO NOT clean the device with solvent (thinner, gasoline, acid etc.) and / or abrasive cleaning agents.




SISEL MÜHENDİSLİK ELEKTRONİK SAN. VE TİC. A.Ş.
 Serifali Mah. Barbaros Cad. No:18 Y.Duduğu 34775
 ÜMRANIYE/İSTANBUL-TURKEY
 Tel : +90 216 499 46 64 Pbx. Fax : +90 216 365 74 01
 url : www.enda.com.tr




Entering from the Programming Mode to the run mode:
 If no key is pressed within 20 seconds during Programming Mode, the data is stored automatically and the Running Mode is entered.

Alternatively, the same function occurs first pressing \blacktriangle key and \blacktriangledown key is pressing Programming Mode is entered. Then \blacksquare and \blacktriangle keys are pressing

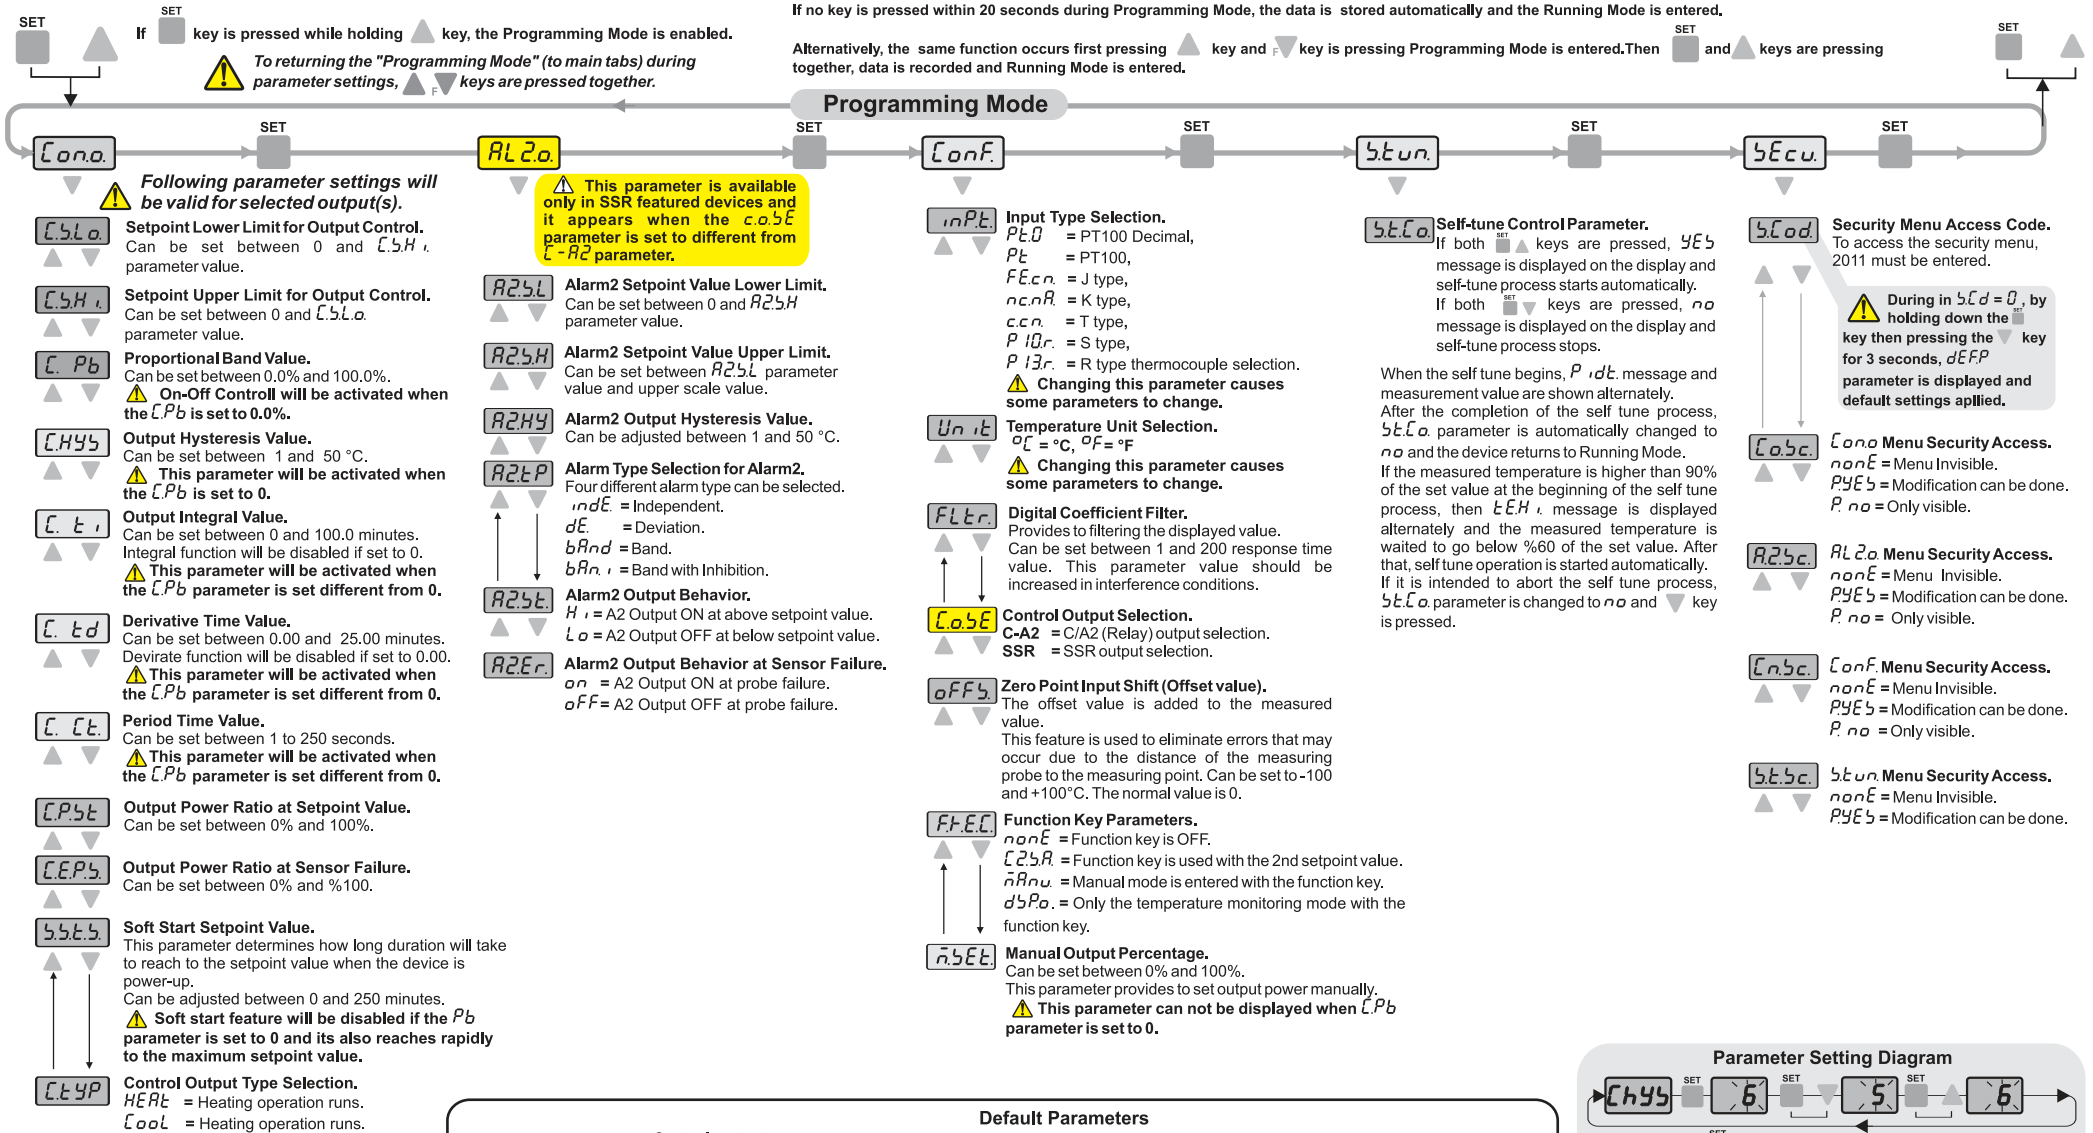

Default Parameters




Set parameters	Control output parameters		Alarm2 output parameters		Configuration parameters		Self tune parameters		Security parameters	
	TC input	PT100 input	TC input	PT100 input	TC input	PT100 input	TC input	PT100 input	TC input	PT100 input
C15E 400	C5Lo	0	A25L	0	inPt	FEcn	A2Er	no	C.o.s.c.	PYE5
C25E 400	C5Hi	600	A25H	600	Un it	oF			A25.c.	PYE5
A25E 500	CPb	0	A2HY	2	FLtr	25			C.n.f.c.	PYE5
	CHY5	2	A2EP	indE	C.o.s.E	C-R2			S.t.u.c.	PYE5
	CEi	4.0	A25t	H i	oFF5	0				
	CEd	1.00	A2Er	on	F.F.E.C.	nonE				
	CEt	20			n.5.E.t.	50				
	CP5t	0								
	CEP5	0								
	S5t5	0								
	CEYP	HEAT								

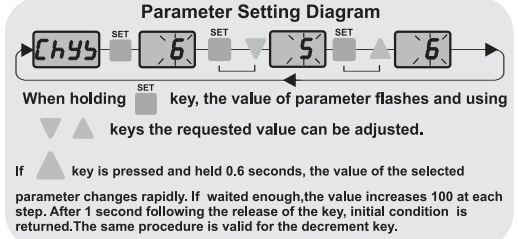

DIMENSIONS



To removing mounting clamps ;
 - Push flush mounting clamps in direction **1** as shown in the figure below. Then pull out the clamps in direction **2** .

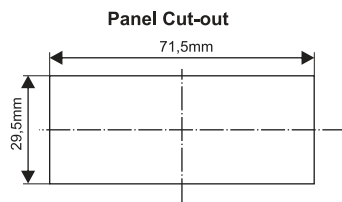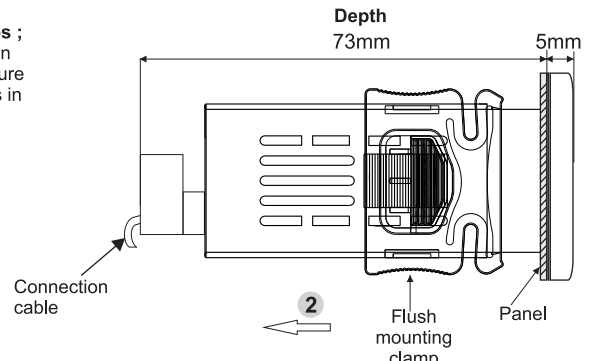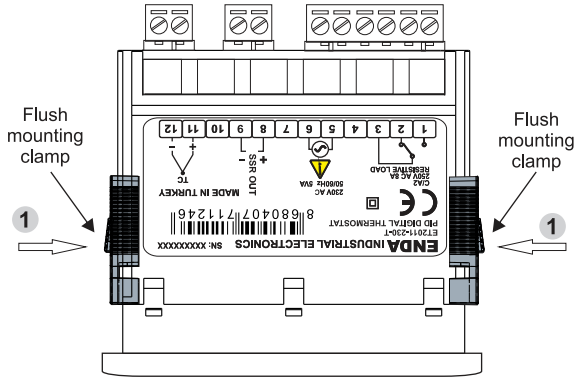



Note :

- 1) Panel thickness should be maximum 7mm.
- 2) If there is no 60mm free space at back side of the device, it would be difficult to remove it from the panel.

Connection Diagram




ENDA ET2011 is intended for installation within control panels. Make sure that the device is used only for intended purpose. The shielding must be grounded on the instrument side. During an installation, all of the cables that are connected to the device must be free of electrical power. The device must be protected against inadmissible humidity, vibrations, severe soiling. Make sure that the operation temperature is not exceeded. All input and output lines that are not connected to the supply network must be laid out as shielded and twisted cables. These cables should not be close to the power cables or components. The installation and electrical connections must be carried out by a qualified staff and must be according to the relevant locally applicable regulations.

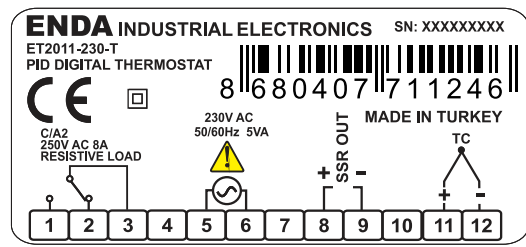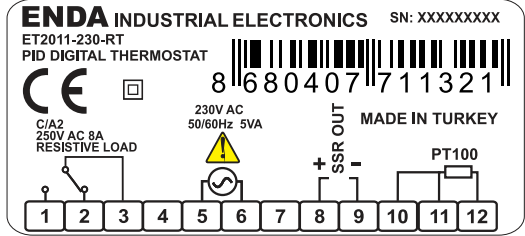

Equipment is protected throughout by **DOUBLE INSULATION**.

Holding screw **0.4-0.5Nm**.

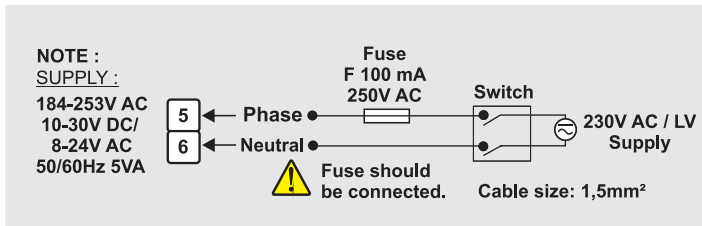

- Note :**
- 1) Mains supply cords shall meet the requirements of IEC 60227 or IEC 60245.
 - 2) In accordance with the safety regulations, the power supply switch shall bring the identification of the relevant instrument and it should be easily accessible by the operator.