


POLARON IQ. PERFECT DESIGN FOR MAXIMUM OPTIONS.

- The filigree, perfectly proportioned ring blends harmoniously into the interior design
- The modularly-designed product range provides maximum design flexibility due to various ring sizes and light emissions
- Suitable accessories enable recessed or semi-recessed mounting
- The luminaire is very quickly mounted

www.trilux.com/polaroniq

Detailed product information:
www.trilux.com/polaroniq

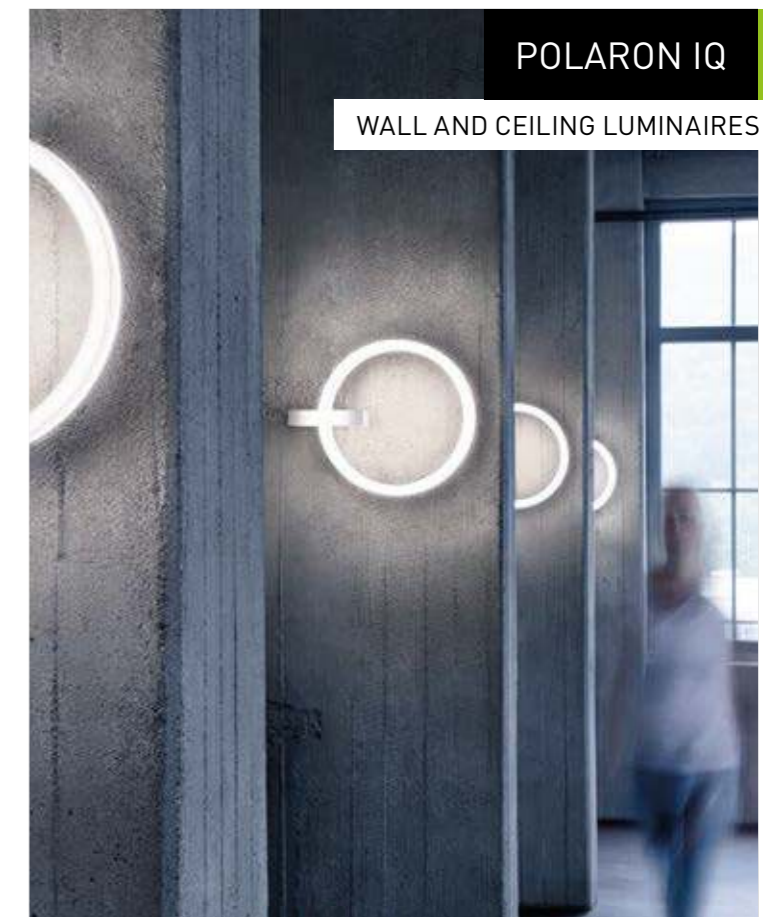

POLARON IQ

WALL AND CEILING LUMINAIRES



Polaron IQ

Mounting type
Surface-mounted

Mounting location
Ceiling
Wall

Beam characteristic
Lambertian
Direct-indirect

Luminaire luminous flux
900 - 3,100 lm

Colour rendering index | Light colour
Ra > 80
3,000 K
4,000 K

Service life
L80 = 70,000 h

Luminaire colour
White

Operating mode
Switchable and DALI dimmable (ETDD)
Switchable (ET)


Additional equipment
Single battery system, 3 hours

Accessories
Concrete casting box
Recess housing
Semi-recessed housing

IP40



Light emission direct-indirect or only indirect

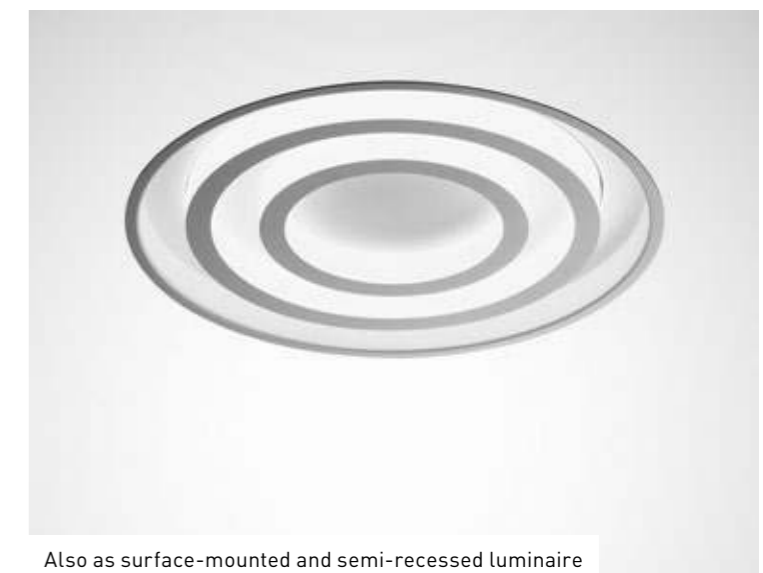

Also as surface-mounted and semi-recessed luminaire

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase · D-59759 Arnsberg

Postfach 19 60 · D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.