



POLARON IQ H. PERFECT DESIGN FOR MAXIMUM OPTIONS.

- The filigree, perfectly proportioned ring blends harmoniously into the interior design
- The suspended luminaire has no separate supply cable – power supply is via the filigree wire suspensions
- The luminaire is available optionally as a recessed, semi-recessed, surface-mounted or suspended luminaire, with direct/indirect or only indirect light emission, and can be installed as a wall or ceiling luminaire

www.trilux.com/polaroniq




Detailed product information:
www.trilux.com/polaroniq




POLARON IQ H

SUSPENDED LUMINAIRES

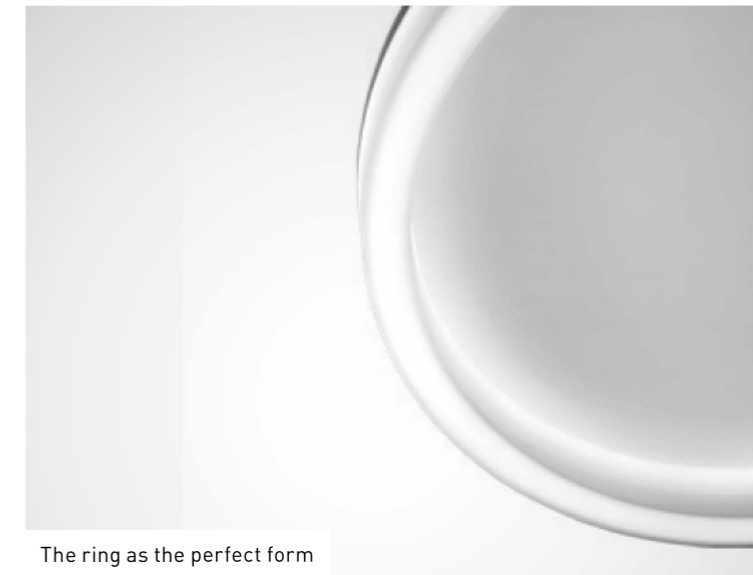

The ring as the perfect form

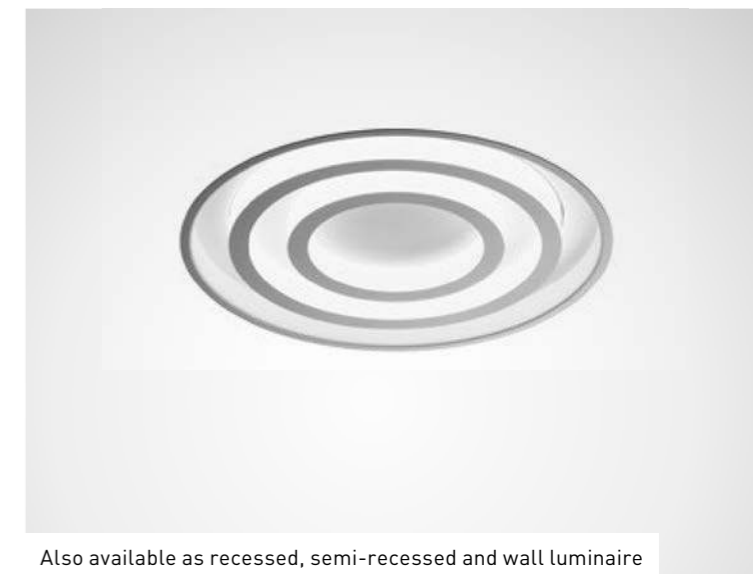

Also available as recessed, semi-recessed and wall luminaire

Polaron IQ H

Mounting type
Suspended

Beam characteristic
Lambertian
direct-indirect

Luminaire luminous flux
1,700 - 2,000 lm

Colour rendering index | Light colour
Ra > 80
3,000 K
4,000 K

Service life
L80 = 70,000 h

Luminaire colour
white

Operating mode
switchable and DALI dimmable (ETDD)
switchable (ET)

Accessories
Fixing accessories



CONTACTS

TRILUX GmbH & Co. KG

Heidestrase · D-59759 Arnsberg

Postfach 19 60 · D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.