

## ONDO G3. SIMPLE REFURBISHING OF HALL LIGHTING.

- Low investment costs, high savings potential and low refurbishment effort make the Ondo economically extremely attractive
- High IP65 protection rating and maintenance-free service life up to 50,000 hours
- Available with a narrow-wide distribution optic in 10,000 lm, 20,000 lm and 30,000 lm


[www.trilux.com/ondo](http://www.trilux.com/ondo)

Detailed product information:  
[www.trilux.com/ondo](http://www.trilux.com/ondo)



ONDO G3

HIGH-BAY LUMINAIRES

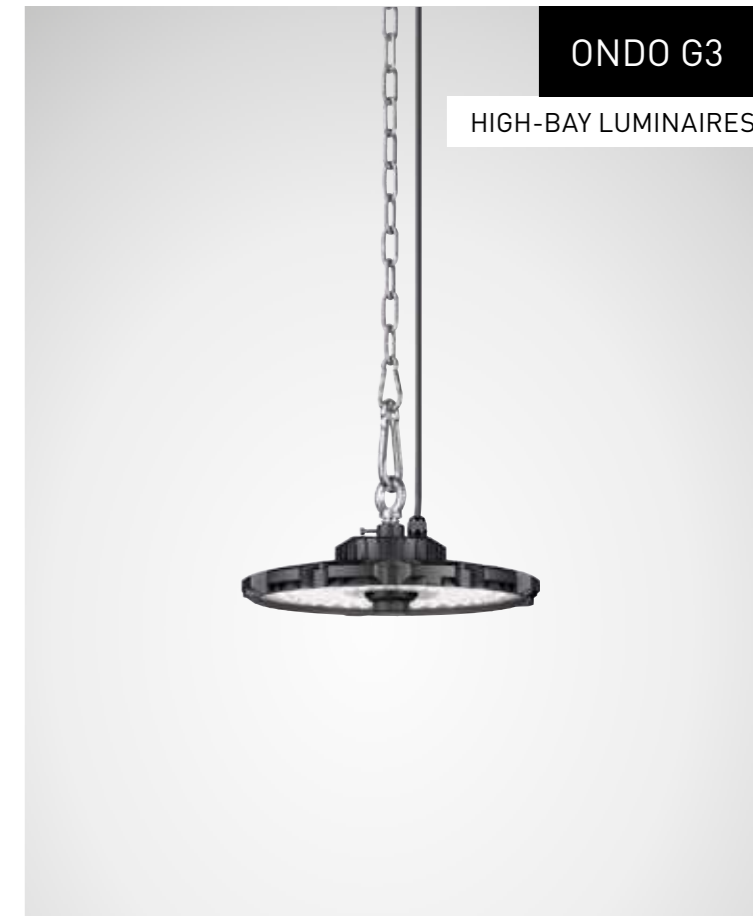

### Ondo G3

- Mounting type**  
Suspended
- Mounting location**  
Wall  
Ceiling
- Beam characteristic**  
wide
- Luminaire luminous flux**  
10,000 - 30,000 lm
- Colour rendering index | Light colour**  
Ra > 80  
4,000 K
- Service life**  
L80 (tq 25 °C) = 50,000 h
- Luminaire colour**  
black
- Operating mode**  
switchable and DALI dimmable (ETDD)  
switchable (ET)
- Accessories**  
Fixing accessories  
Chains  
Sensor remote control  
Sensors



# CONTACTS

## **TRILUX GmbH & Co. KG**

Heidestrase · D-59759 Arnsberg

Postfach 19 60 · D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

[www.trilux.com/en](http://www.trilux.com/en)

## **SiSEL Mühendislik Elektronik San. ve Tic. A.ş.**

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

[www.endalight.com](http://www.endalight.com)

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.