

## ALTIGO G2. LIGHT LINE FOR ILLUMINATING PATHS AND FACADES.

- Diverse uses thanks to various lengths, selectable optics and several mounting options
- Slender, flat design for installation in difficult-to-access locations with low mounting space
- Robust and durable due to selected materials and high-quality workmanship

[www.trilux.com/altigobe](http://www.trilux.com/altigobe)



Detailed product information:  
[www.trilux.com/altigobe](http://www.trilux.com/altigobe)




ALTIGO G2

GROUND-RECESSED LUMINAIRES



Mounting enclosure

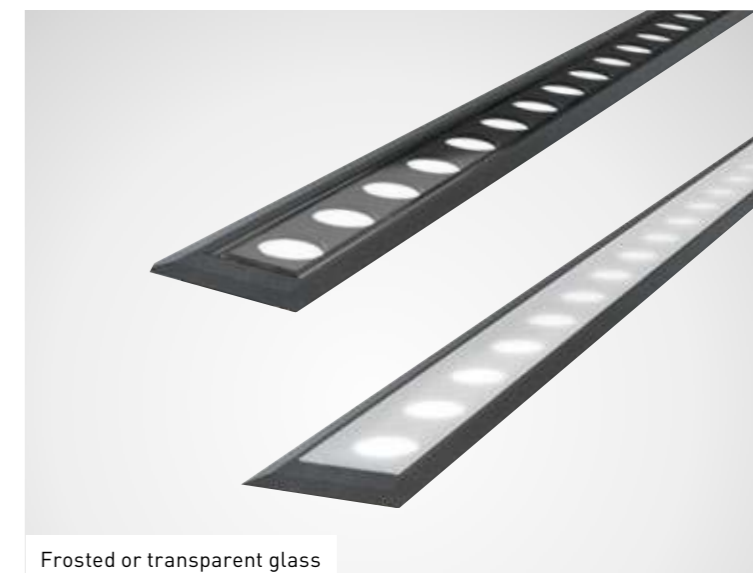

Frosted or transparent glass

### Altigo G2

**Mounting type**  
Outdoor ground-recessed

**Mounting location**  
Outdoor ground

**Beam characteristic**  
asymmetric medium-wide  
rotationally symmetric wide  
rotationally symmetric narrow  
rotationally symmetric medium wide  
symmetric narrow

**Luminaire luminous flux**  
350 - 4,000 lm

**Colour rendering index | Light colour**  
Ra > 80  
3,000 K  
4,000 K

**Service life**  
L80 = 50,000 h

**Luminaire colour**  
anthracite

**Accessories**  
Connection sockets  
Control units  
Mounting enclosure

CE UK IP67

# CONTACTS

## **TRILUX GmbH & Co. KG**

Heidestrase · D-59759 Arnsberg

Postfach 19 60 · D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

[www.trilux.com/en](http://www.trilux.com/en)

## **SiSEL Mühendislik Elektronik San. ve Tic. A.ş.**

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

[www.endalight.com](http://www.endalight.com)

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.