

## SO-TUBE G3 H. INDUSTRIAL STYLE MEETS NEW WORK.

- The robust charm of the design blends ideally into industrial-style office environments
- Modern LED technology with linear light design and a round light emission surface
- Diverse mounting methods provide creative options for design


[www.trilux.com/sotube-led](http://www.trilux.com/sotube-led)

Detailed product information:  
[www.trilux.com/so-tube-led](http://www.trilux.com/so-tube-led)



SO-TUBE G3 H


SUSPENDED LUMINAIRES

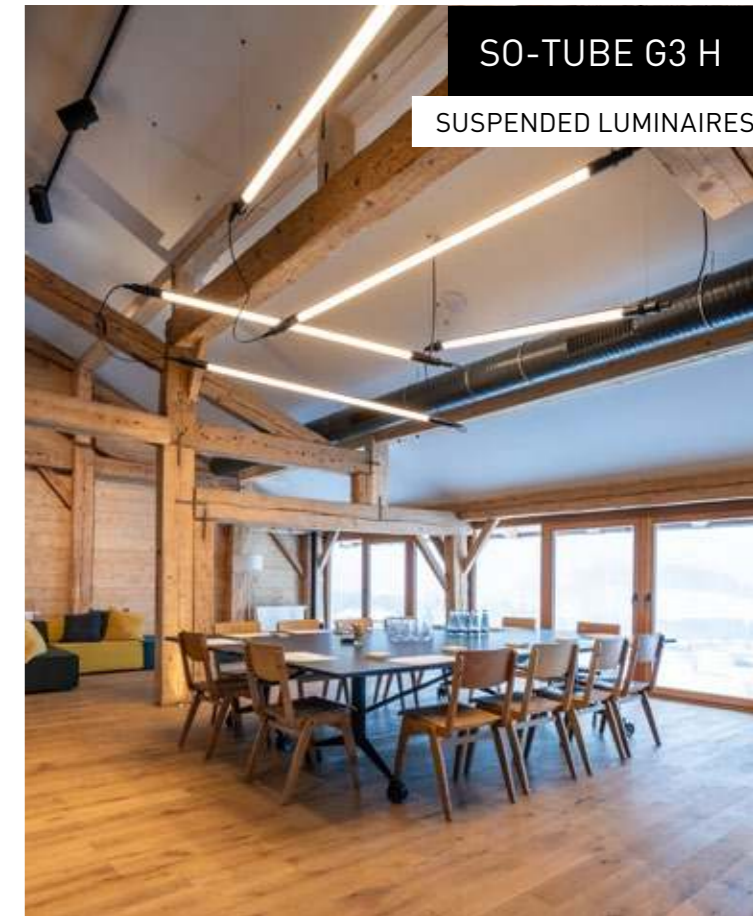

### So-Tube G3 H

- Mounting type**  
Suspended
- Beam characteristic**  
Lambertian  
direct-indirect
- Luminaire luminous flux**  
7,800 lm
- Colour rendering index | Light colour**  
Ra > 80  
3,000 K  
4,000 K  
Tunable White 2,700 K- 6,500 K
- Service life**  
L80 = 50,000 h
- Luminaire colour**  
black
- Operating mode**  
switchable and DALI dimmable (ETDD)
- Connectivity**  
LiveLink WiFi capable
- Accessories**  
Connection cables  
Ceiling roses  
Ceiling roses with LiveLink  
Ceiling roses with LiveLink WiFi  
Connection cables

IP20

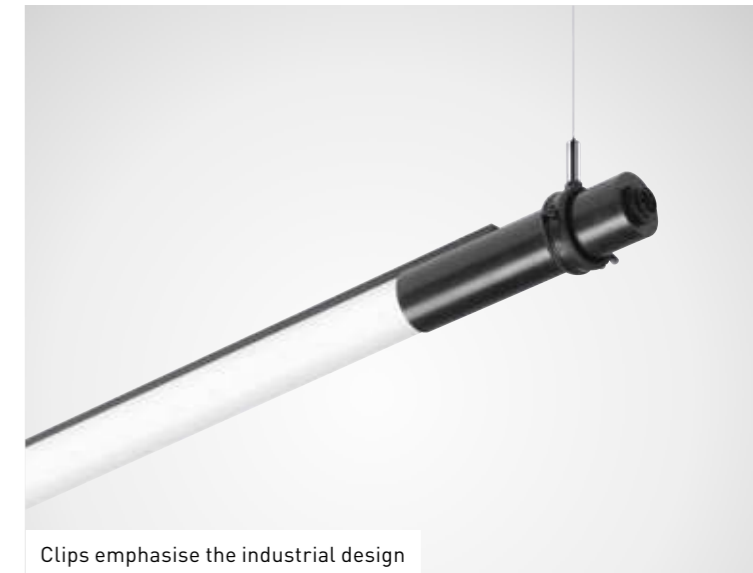

Clips emphasise the industrial design



Also available as surface-mounted luminaire

# CONTACTS

## **TRILUX GmbH & Co. KG**

Heidestrase · D-59759 Arnsberg

Postfach 19 60 · D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

[www.trilux.com/en](http://www.trilux.com/en)

## **SiSEL Mühendislik Elektronik San. ve Tic. A.ş.**

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

[www.endalight.com](http://www.endalight.com)

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.