



KRATEX. THE FINAL BOSS IN EXPLOSION-PROOF AREAS.

- Flame-resistant and explosion-proof LED tubular luminaire with robust metal caps
- Optionally available in polycarbonate (IK10) or glass (IK09)
- DALI and emergency light variants available in the portfolio
- Lumen packages of up to 11,750 lm

www.trilux.com/atex

Detailed product information:
www.trilux.com/atex



KRATEX

LUMINAIRES WITH HIGHER PROTECTION RATING



Kratex

ATEX designation
Gas: II 2G Ex db IIC T6 Gb
Dust: II 2D Ex tb IIIC T85°C Db

Mounting type
Surface-mounted

Mounting location
Ceiling
Wall

Beam characteristic
Lambertian

Luminaire luminous flux
2,500 - 11,750 lm

Colour rendering index | Light colour
Ra > 80
4,000 K

Service life
L80 = 50,000 h

Luminaire colour
Signal yellow

Operating mode
Switchable and DALI dimmable (ETDD)
Switchable (ET)


Additional equipment
Single battery system, 1 hour
Single battery system, 3 hours

Accessories
Suspensions
Fixing bracket
Cable glands

IP66



Flame retardant, protection mode dB

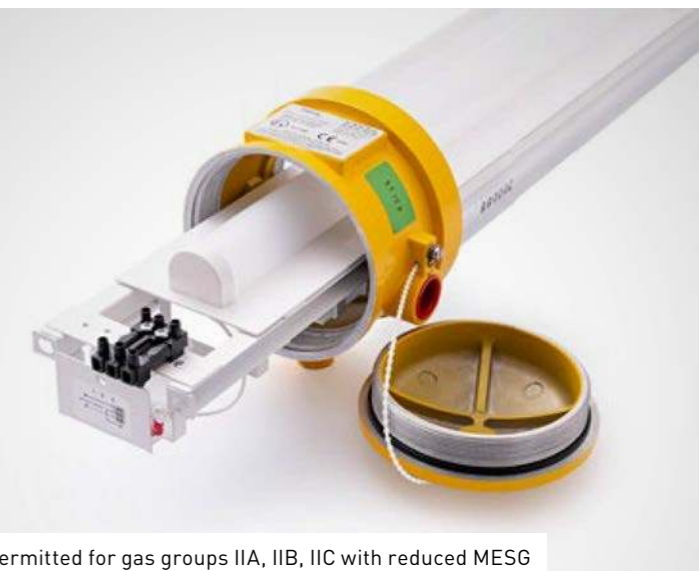

Permitted for gas groups IIA, IIB, IIC with reduced MESG

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase · D-59759 Arnsberg

Postfach 19 60 · D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.