



SKEO PURA. FLAT SQUARES FOR ATTRACTIVE FACADE LIGHTING.

- A flat design in a square shape for illuminating prestigious facades
- Resistant against dust and water jets with IP65 protection rating due to coated die-cast aluminium body
- The uniformly illuminated cover panel generates pleasant, atmospheric light – ideal for prestigious areas


www.trilux.com/skeopura

Detailed product information:
www.trilux.com/skeopura



SKEO PURA

WALL AND CEILING LUMINAIRES

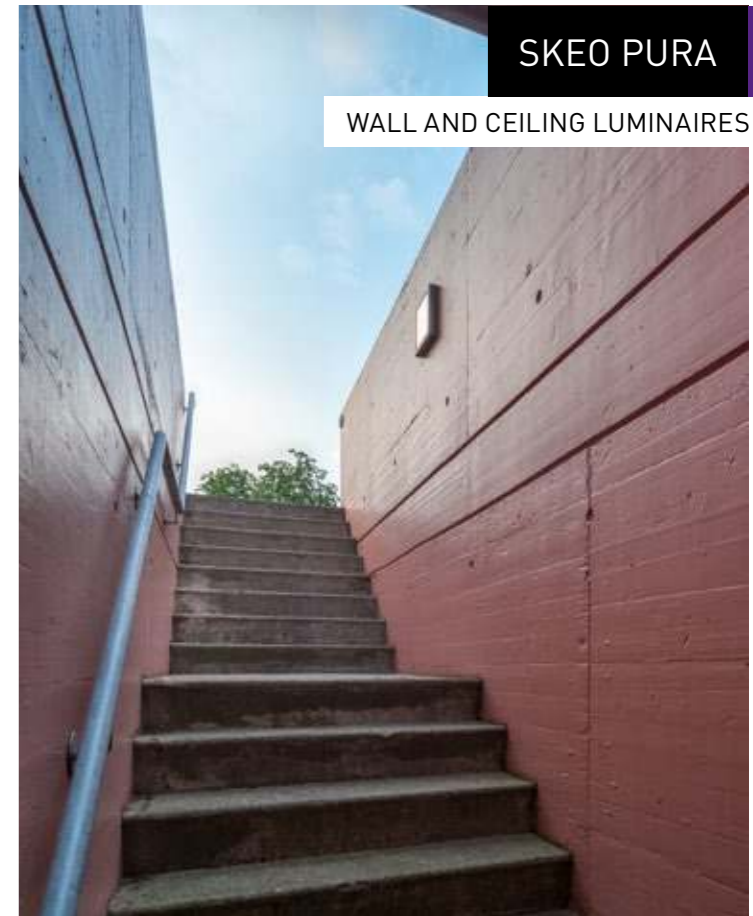

Skeo Pura

Mounting type
Surface-mounted

Mounting location
Outdoor wall
Outdoor ceiling

Beam characteristic
Lambertian

Luminaire luminous flux
500 - 1,650 lm

Colour rendering index | Light colour
Ra > 80
3,000 K
4,000 K

Service life
L80 = 50,000 h

Luminaire colour
anthracite

Operating mode
switchable (ET)

Accessories
House number labelling
Accessory frames

CE UK IP65

CONTACTS

TRILUX GmbH & Co. KG

Heidestrase · D-59759 Arnsberg

Postfach 19 60 · D-59753 Arnsberg

GERMANY

Tel. +49 2932 301-0

www.trilux.com/en

SiSEL Mühendislik Elektronik San. ve Tic. A.ş.

Şerifali Mah. Barbaros Cad. No 18

34775 Ümraniye İstanbul

TURKEY

Tel: +90 (216) 499 46 64

www.endalight.com

All technical data including dimensional and weight specifications have been compiled with due care. Errors reserved. Possible colour deviations are due to printing processes. We reserve the right to modify in the interest of progress. Luminaires are partly shown with accessories that must be ordered separately. Images of installations may show custom-manufactured luminaires. This publication was printed on PEFC-certified paper in an environmentally friendly way.